


### 3.1 - POWER SUPPLY MODULE

**Mod.3000 Universal power supply. (3002+3004) (also available 220V 60Hz version).**

- Power requirements: 380/400V, 3PH+N+G, 50Hz

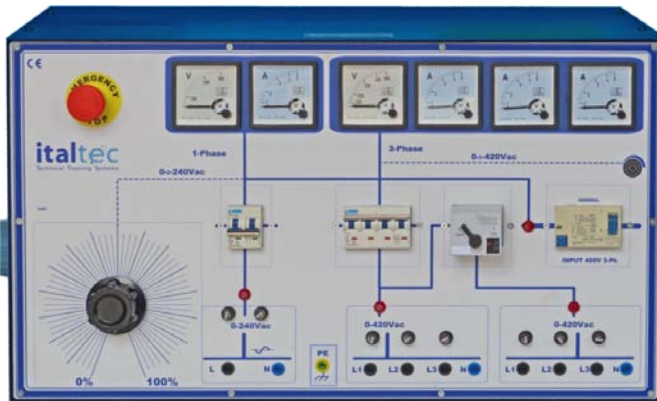

- **Mod.3002** 3-Ph/1Ph AC power supply 3+3A



**Mod.3004** DC power supply 2+3A

General protection with high sensitivity magneto thermal differential (0,03A) automatic circuit breaker. Mushroom emergency push -button  
All outputs are protected by means of an automatic magneto thermal circuit breaker and fuses. Adjustable 3Ph motor overload protection.  
*Dimensions: 2x 70x40x40h(cm)*

3 phase adjustable output: 0-420V, 3A with  
- 1 x A.C. voltmeter - 3 x A.C. ammeters  
adjustable motor overload protection

Single phase adjustable output: 0-240V 3A with  
- 1 x A.C. voltmeter - 1 x A.C. ammeter

**Mod.3002D -3-Ph AC digital power supply**  
with digital instruments



DC variable output: 0-230V, 2A with  
- 1 x D.C. voltmeter - 1 x D.C. ammeter

D.C. fixed output: 220V, 3A- with 1 x D.C. ammeter

Single phase output: fixed 230Vac 10A with- 1 x A.C. ammeter

**Mod.3004D digital DC power supply**  
with digital instruments



**Mod.3004-02 DC power supply**



DC variable output: 0÷230V, 2A with  
- 1 x D.C. voltmeter - 1 x D.C. ammeter

**Mod.3004-02-04 DC power supply**



DC variable output: 0÷230V, 2A with  
- 1 x D.C. voltmeter - 1 x D.C. ammeter

D.C. fixed output: 220V, 4A - with 1 x D.C. ammeter