

SINGLE / THREE PHASE LOADS

Resistive - Inductive - Capacitive

Mod.5020 - 2KVA - Variable with 7 step

Mod.5020-10 - 2KVA - Variable with 10 step

Mod.5020-R
Mod.5020-L
Mod.5020-C

Mod.5020-10R
Mod.5020-10L
Mod.5020-10C

*Resistive, Inductive,
Capacitive Loads.*

*Variable with 7 or 10 uniform
steps.*

*Provided with silk screened front
panel and with 4mm CE safety
sockets.*

*Robust metallic base with rubber
feet.*

*For R models the evacuation of
heat is obtained thanks to an
electric fan.*

Single-phase :

up to 240V 50/60Hz

Three-phase:

up to 240/415V (D/Y) 50Hz

Other power available:

*from 0,3 (Mod.3020) up to
20kVA (Mod.20020)*


Dimensions

-TTop

LxWxH: 50x40x40h cm.

English operation manual

French operation manual


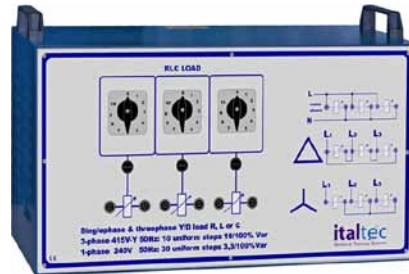


MOD.5020-R Resistive Load module, Variable with 7 step
MOD.5020-L Inductive Load module, Variable with 7 step
MOD.5020-C Capacitive Load module, Variable with 7 step

For balanced or unbalanced 3-phase loads (star and delta) and single-phase loads. Each phase can be independently varied with 7 uniform steps up to max current value for full power. Single-phase connection provides 21 regulation steps.

MOD.5020-10R Resistive Load module, variable with 10 step
MOD.5020-10L Inductive Load module, variable with 10 step
MOD.5020-10C Capacitive Load module, variable with 10 step

For balanced or unbalanced 3-phase loads (star and delta) and single-phase loads. Each phase can be independently changed in 10 uniform steps up to max current value of full load. Single-phase connection provides 30 regulation steps.

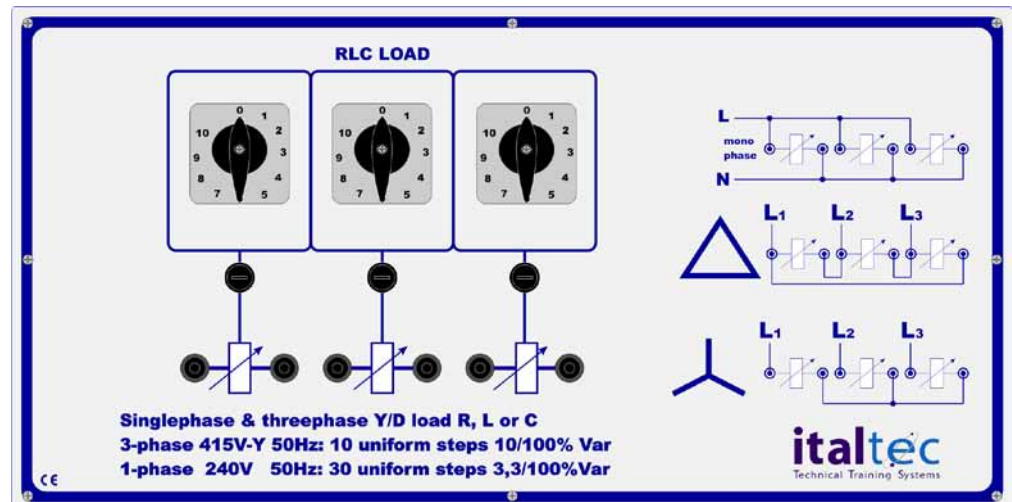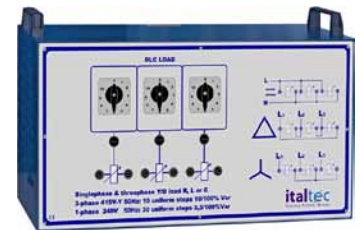

Regulation step for each-phase **MOD.5020-RLC**

MOD.5020-10RLC

Step	VA	Amp.	Perc.	Step	VA	Amp.	Perc.
1	100	0,43	14%	1	67	0,29	10%
2	200	0,87	29%	2	133	0,58	20%
3	300	1,30	43%	3	200	0,87	30%
4	400	1,74	57%	4	267	1,16	40%
5	500	2,17	72%	5	333	1,45	50%
6	600	2,61	86%	6	400	1,74	60%
7	700	3,04	100%	7	467	2,03	70%
				8	533	2,32	80%
				9	600	2,61	90%
				10	667	2,90	100%

Power variation (230V):
Mod.5020-RLC

1phase: 5% ÷ 100% -100÷2150VA
3phase: 15% ÷ 100% -300÷2100VA

Power variation (230V):
Mod.5020-10RLC

1phase: 3,3% ÷ 100% -67÷2000VA
3phase: 10% ÷ 100% -200÷2000VA