


3.1 - POWER SUPPLY MODULE

Mod.4000 Universal power supply. (4002+4004) (also available 220V 60Hz version).

- Power requirements: 380/400V, 3PH+N+G, 50Hz

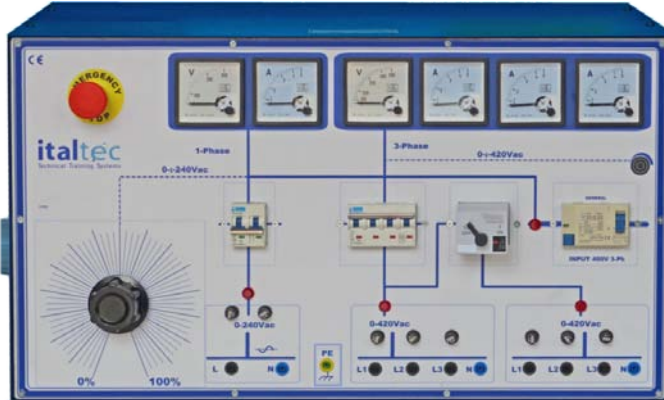

Mod.4002 3-Ph/1Ph AC power supply 4,5+5A



- | **Mod.4004** DC power supply 2+5A

General protection with high sensitivity magneto thermal differential (0,03A) automatic circuit breaker. Mushroom emergency push -button
All outputs are protected by means of an automatic magneto thermal circuit breaker and fuses. Adjustable 3Ph motor overload protection.
Dimensions: 2x 70x40x40h(cm)

3 phase adjustable output: 0÷440V, 4,5A with
- 1 x A.C. voltmeter - 3 x A.C. ammeters
adjustable motor overload protection

Single phase adjustable output: 0÷250V 5A with
- 1 x A.C. voltmeter - 1 x A.C. ammeter

DC variable output: 0÷230V, 2A with
- 1 x D.C. voltmeter - 1 x D.C. ammeter

D.C. fixed output: 220V, 5A
- with 1 x D.C. ammeter

Single phase triple output: fixed 230Vac 16A
- 1 x A.C. ammeter



Mod.4002D 3-Ph/1Ph AC power supply(Digital)



Mod.4004D -DC power supply (Digital)



Mod.4002-6-6 -3-Ph AC power supply 6+6A

3 phase adjustable output: 0÷440V, 6A with
- 1 x A.C. voltmeter - 3 x A.C. ammeters

Single phase adjustable output: 0÷250V 6A with
- 1 x A.C. voltmeter - 1 x A.C. ammeter



Mod.4004-3-5 -DC power supply

DC variable output: 0÷230V, 3A with
- 1 x D.C. voltmeter - 1 x D.C. ammeter

DC fixed output: 220Vdc 5A
- 1 x A.C. ammeter